



Design By Ramos & Bassols

The Spa wall or ceiling lamp projects a bright glare-free light thanks to the subtle fluted effect of shade. The aluminum frame has a various finishes to adapt to different interior designs.

Spec sheet

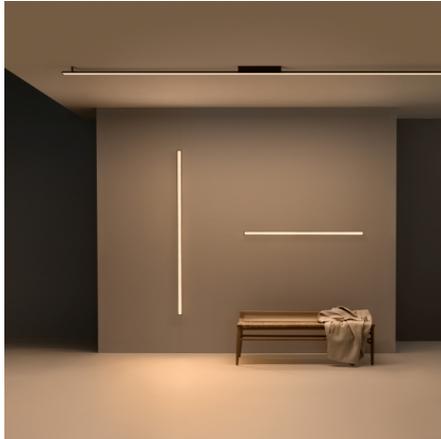

Finish

- 23 Warm White  
NCS S 0502-Y50R
- 25 Beige D1  
NCS S 4005-Y50R
- 11 Black  
NCS S 8500-N

LED 2700 K / 3500 K

Dimming 0-10V / TRIAC

LED CRI>90 1560 lm 144  
2700 K / 3500 K

Driver Constant Current 600 120~277 V V  
50~60 Hz HZ




Application Ceiling Fixtures

Packaging 2 Box  
59.06 m x 3.94 m x 3.94 m  
Gross weight 7.71  
Net weight 4.63  
Vol. 0.618



Lighting effect

Linear

Linear lighting applications for functional and graphic illumination



Photometric Data

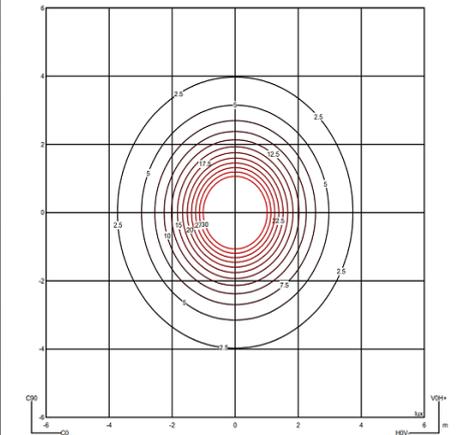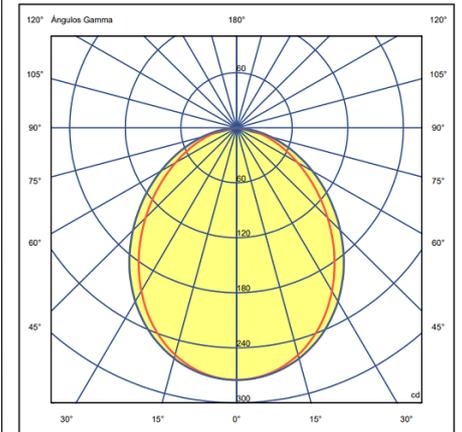

Efficiency 61.06 lm/W  
Coordination System CG  
Total Flux 644.16 lm  
Maximum Value 275.08 cd


Min. Quantity, upcharge and extra lead time apply

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Ramos & Bassols

The Spa wall or ceiling lamp projects a bright glare-free light thanks to the subtle fluted effect of shade. The aluminum frame has a wide range of finishes to adapt to different interior designs.

## Spec sheet



### Finish

- 11 Black  
NCS S 8500-N
- 25 Beige D1  
NCS S 4005-Y50R
- 23 Warm White  
NCS S 0502-Y50R

### LED

2700 K / 3500 K

### Dimming

TRIAC / 0-10V

### Installation type

Surface

### LED

CRI>90 2560 lm 119  
2700 K / 3500 K

### Driver

Constant Current 600 120~277 V V  
50~60 Hz HZ



### Application

Ceiling Fixtures


### Packaging

2 Box  
90.55 m x 3.94 m x 3.94 m  
Gross weight 10.35  
Net weight 6.39  
Vol. 0.9005



### Lighting effect

#### Linear

Linear lighting applications for functional and graphic illumination



### Photometric Data

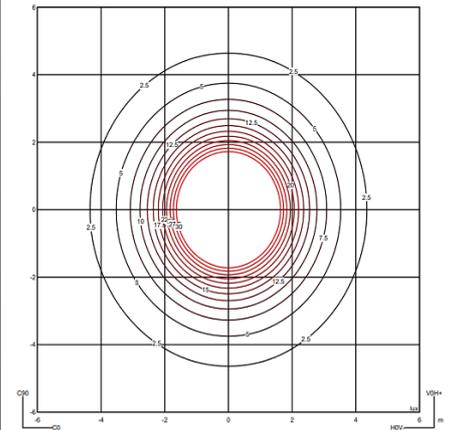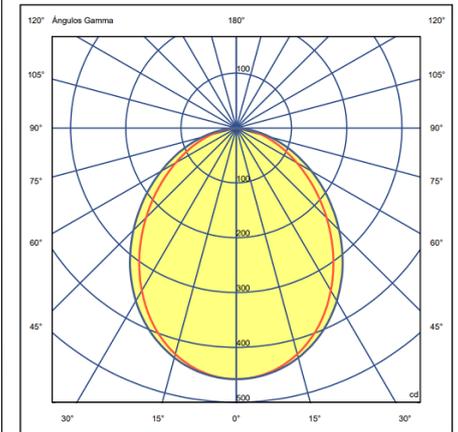

Efficiency 60.77 lm/W  
Coordination System CG  
Total Flux 1071.98 lm  
Maximum Value 457.78 cd

Any modifications require a minimum order quantity and extra lead time

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina  
272 Fernwood Ave. Edison, NJ 08837. USA



International T 732 417 1700  
Spain / Portugal T +34 934 796 970

sales@vibia.com  
www.vibia.com/us/usa

Design By Ramos & Bassols

The Spa wall or ceiling lamp projects a bright glare-free light thanks to the subtle fluted effect of shade. The aluminum frame has a various finishes to adapt to different interior designs.

## Spec sheet

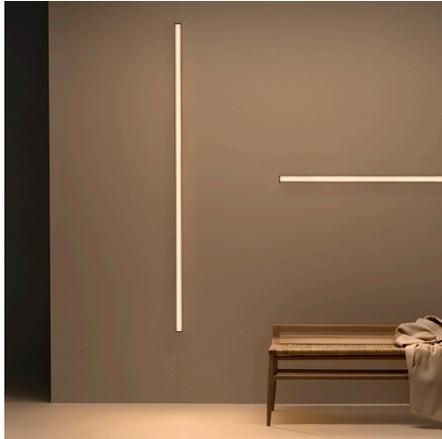

### Finish

- 23 Warm White  
NCS S 0502-Y50R
- 11 Black  
NCS S 8500-N
- 25 Beige D1  
NCS S 4005-Y50R

**LED** 2700 K / 3500 K

**Dimming** TRIAC / 0-10V

**Installation type** Surface

**LED** CRI>90 3840 lm 119  
2700 K / 3500 K

**Driver** Constant Current 600 120-277 V V  
50-60 Hz HZ




**Application** Ceiling Fixtures

**Packaging** 2 Box  
129.92 m x 3.94 m x 3.94 m  
Gross weight 13.88  
Net weight 8.59  
Vol. 1.2537



### Lighting effect

#### Linear

Linear lighting applications for functional and graphic illumination



### Photometric Data

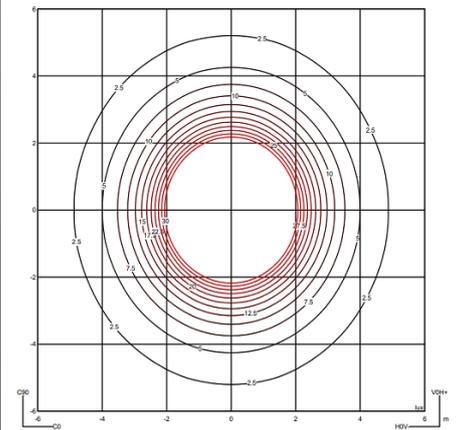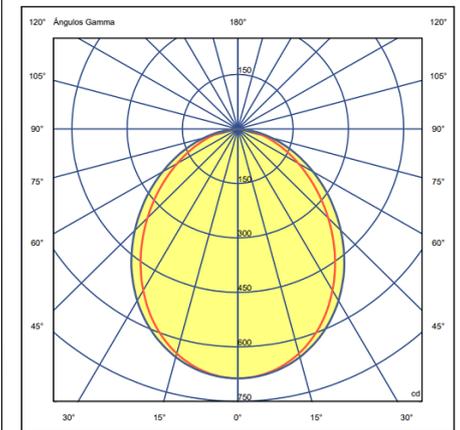

**Efficiency** 60.77 lm/W  
**Coordination System** CG  
**Total Flux** 1607.97 lm  
**Maximum Value** 686.66 cd


Any modifications require a minimum order quantity and extra lead time

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Ramos & Bassols

The Spa vanity light is distinguished by its minimalist, refined forms. Thanks to its linear profile, the LED light can be oriented in the desired direction.

## Spec sheet



Any modifications require a minimum order quantity and extra lead time

### Finish

23 Warm White  
NCS S 0502-Y50R

11 Black  
NCS S 8500-N

25 Beige D1  
NCS S 4005-Y50R

### LED

2700 K / 3500 K

### Dimming

TRIAC / 0-10V

### Installation type

Surface

### LED

CRI>90 1560 lm 144  
2700 K / 3500 K

### Driver

Constant Current 600 120~277 V V  
50~60 Hz HZ

Dimmable LED Multi-volt  Damp Location

### Application

Wall Fixtures


### Packaging

2 Box  
59.06 m x 3.94 m x 3.94 m  
Gross weight 7.71  
Net weight 4.63  
Vol. 0.618



### Lighting effect

#### Linear

Linear lighting applications for functional and graphic illumination



### Photometric Data

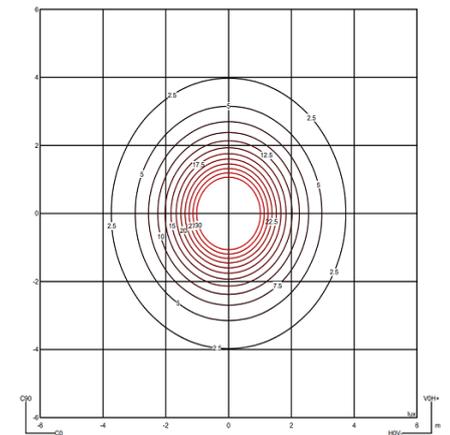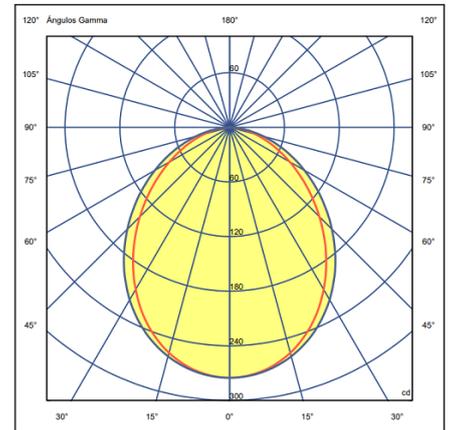


Efficiency 60.77 lm/W  
Coordination System CG  
Total Flux 644.16 lm  
Maximum Value 275.08 cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition [sales@vibia.com](mailto:sales@vibia.com)

Design By Ramos & Bassols

The Spa vanity light is distinguished by its minimalist, refined forms. Thanks to its linear profile, the LED light can be oriented in the desired direction.

### Spec sheet



#### Finish

25 Beige D1  
NCS S 4005-Y50R

11 Black  
NCS S 8500-N

23 Warm White  
NCS S 0502-Y50R

#### LED

2700 K / 3500 K

#### Dimming

0-10V / TRIAC

#### Installation type

Surface

#### LED

CRI>90 2560 lm 119  
2700 K / 3500 K

#### Driver

Constant Current 600 120~277 V V  
50~60 Hz HZ



#### Application

Wall Fixtures


#### Packaging

2 Box  
90.55 m x 3.94 m x 3.94 m  
Gross weight 10.35  
Net weight 6.39  
Vol. 0.9005



#### Lighting effect

##### Linear

Linear lighting applications for functional and graphic illumination



#### Photometric Data

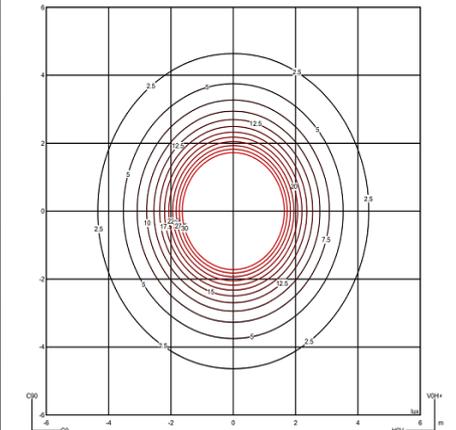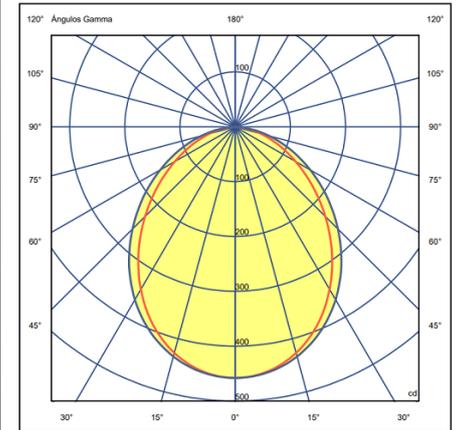

Efficiency 60.77 lm/W  
Coordination System CG  
Total Flux 1071.98 lm  
Maximum Value 457.78 cd


Any modifications require a minimum order quantity and extra lead time

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Ramos & Bassols

The Spa vanity light is distinguished by its minimalist, refined forms. Thanks to its linear profile, the LED light can be oriented in the desired direction.

## Spec sheet



### Finish

25 Beige D1  
NCS S 4005-Y50R

11 Black  
NCS S 8500-N

23 Warm White  
NCS S 0502-Y50R

LED 2700 K / 3500 K

Dimming TRIAC / 0-10V

Installation type Surface

LED CRI>90 3840 lm 119  
2700 K / 3500 K

Driver Constant Current 120-277 V V 50-60  
Hz HZ




Application Wall Fixtures

Packaging 2 Box  
129.92 m x 3.94 m x 3.94 m  
Gross weight 13.88  
Net weight 8.59  
Vol. 1.2537



### Lighting effect

#### Linear

Linear lighting applications for functional and graphic illumination



### Photometric Data

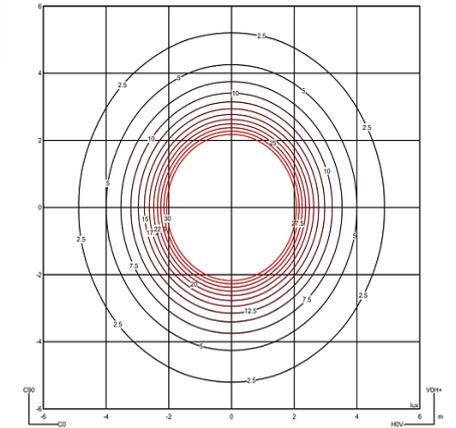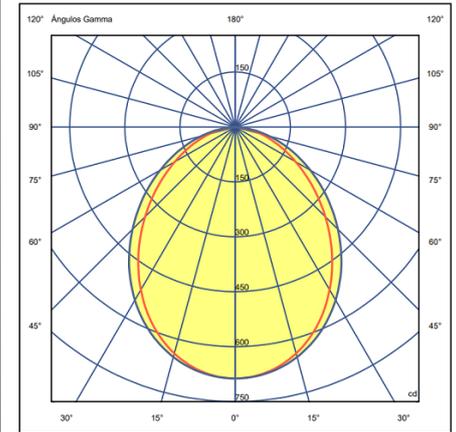

Efficiency 60.77 lm/W  
Coordination System CG  
Total Flux 1607.97 lm  
Maximum Value 686.66 cd

Any modifications require a minimum order quantity and extra lead time

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com