

Kontorno

6414


AM
STUDIO
CUSTOM LIGHTING

VIBIA

Design By Sebastian Herkner

The convex shade wall light features an open metal frame embedded with LEDs that contains a reflector formed from a rounded sheet. The black frame is affixed to the wall and casts a diffused glow that evokes the look of raining light.

Spec sheet



Any modifications require a minimum order quantity and extra lead time

Finish 11 Black
NCS S 8500-N

LED 2700 K / 3500 K

Dimming 0-10V

Installation type Surface

LED CRI>90 2165 lm 104
2700 K / 3500 K

Driver Constant Current 750 100~277 V V
50~60 Hz HZ



Application Wall Fixtures


Packaging Box

Gross weight
Net weight



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the



Photometric Data

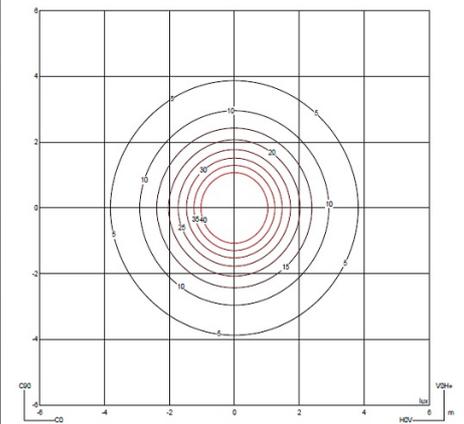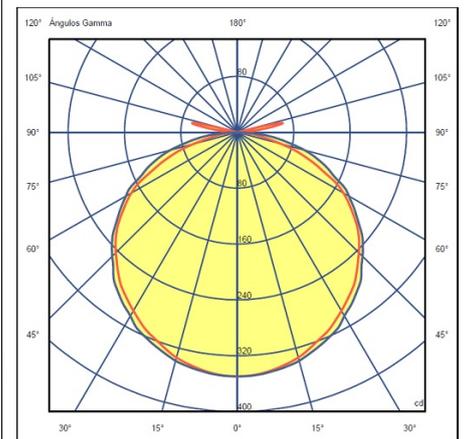

Efficiency 45.26 lm/W
Coordination System CG
Total Flux 1117.95 lm
Maximum Value 349.46 cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700

Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa

Kontorno



6436

VIBIA

Design By Sebastian Herkner

The convex shade pendant features an open frame embedded with LEDs that contains a reflector formed from a rounded sheet of metal. It floats from nearly invisible cables overhead, casting a diffused glow that evokes the look of raining light.

Spec sheet

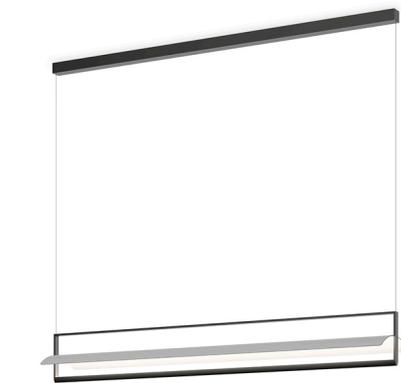

Optional: Extra cable length

Min. Quantity, upcharge and extra lead time apply

Finish  11 Black
NCS S 8500-N

LED 2700 K / 3500 K

Dimming 0-10V

Installation type Surface

LED CRI>90 2907 lm 104
2700 K / 3500 K

Driver Constant Current 750 100~277 V V
50~60 Hz HZ



Application Pendants


Packaging Box

Gross weight
Net weight



Lighting effect

Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the



Photometric Data

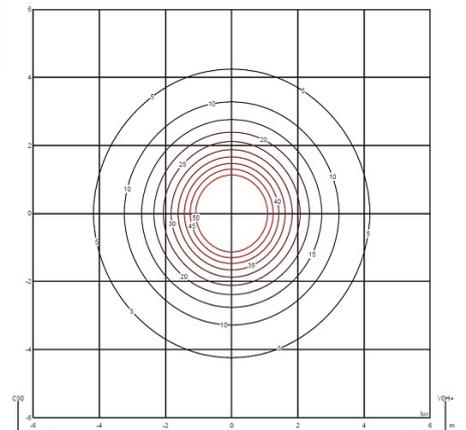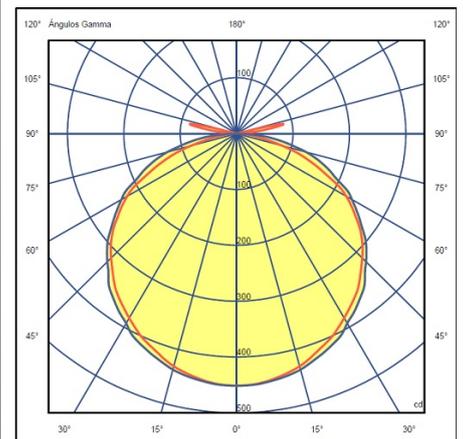

Efficiency 45.27 lm/W
Coordination System CG
Total Flux 1443.83 lm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA


International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa

Design By Sebastian Herkner

The glass shade wall light features an open metal frame imbedded with LEDs that contains a cylindrical diffuser made of handblown opaline glass. The black frame is affixed to the wall, generating a warm, 360-degree glow as if from a fire. Install in a vertical position.

Spec sheet



Finish 11 Black
NCS S 8500-N

LED 2700 K / 3500 K

Dimming 0-10V

Installation type Surface

LED CRI>90 2165 lm 104
2700 K / 3500 K

Driver Constant Current 750 100-277 V V
50-60 Hz HZ



Application Wall Fixtures

Packaging Box

Gross weight
Net weight



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

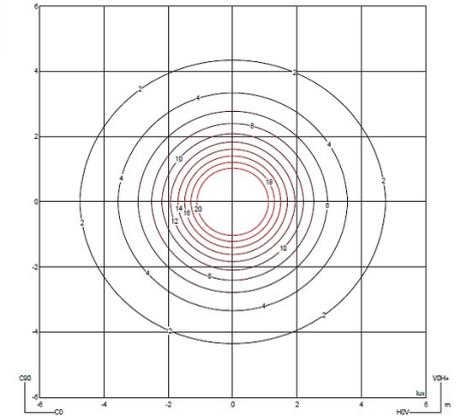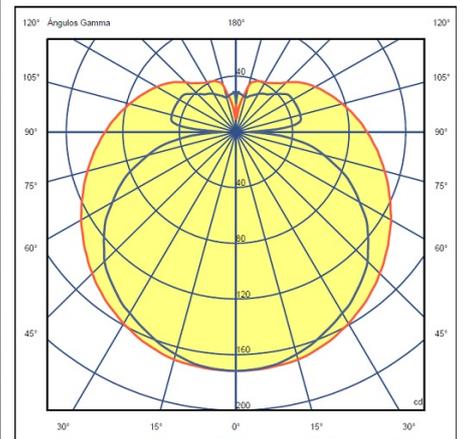

Efficiency 41.95 lm/W
Coordination System CG
Total Flux 1034.74 lm
Maximum Value 171.64 cd

Any modifications require a minimum order quantity and extra lead time

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Kontorno


6474

VIBIA

Design By Sebastian Herkner

The glass shade pendant features an open metal frame imbedded with LEDs that contains a cylindrical diffuser made of mouthblown opaline glass. It floats from nearly invisible overhead cables, generating a warm, 360-degree glow.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish 11 Black
NCS S 8500-N

LED 2700 K / 3500 K

Dimming 0-10V

Installation type Surface

LED CRI>90 2165 lm 104
2700 K / 3500 K

Driver Constant Current 750 100-277 V V
50-60 Hz HZ

 Dimmable  LED  IP20  Multi-volt[®]

Application Pendants


Packaging 1 Box

Gross weight
Net weight



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

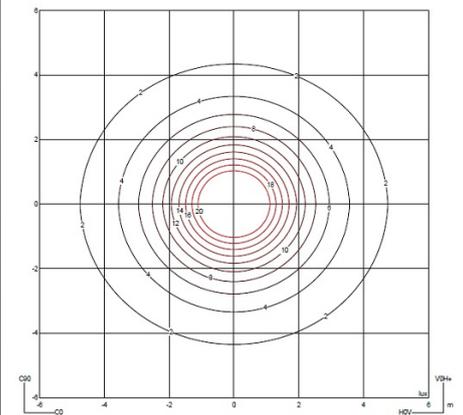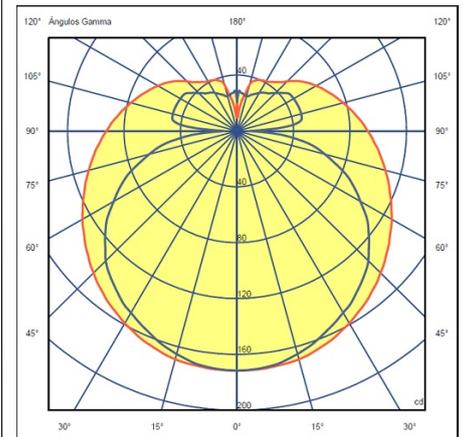

Efficiency 41.96 lm/W

Coordination System CG

Total Flux 1034.74 lm

Maximum Value 171.64 cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa