

Bind 6500


AM
STUDIO
CUSTOM LIGHTING

VIBIA

Design By Martín Azúa



Bind 6500 offers downward accent lighting through a shallow fixture. Its degree of aperture allows for creating high contrasts over long distances.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish	 11 Black NCS S 8500-N
	 24 Beige M1 NCS S 2005-Y50R
LED	2700 K / 3000 K / 3500 K
Dimming	CASAMBI / On/Off 0-10V DALI-2 Casambi Simultaneous Line

Installation type To track

LED CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver 250 48 V V 50~60 Hz HZ



Application Pendants


Packaging Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

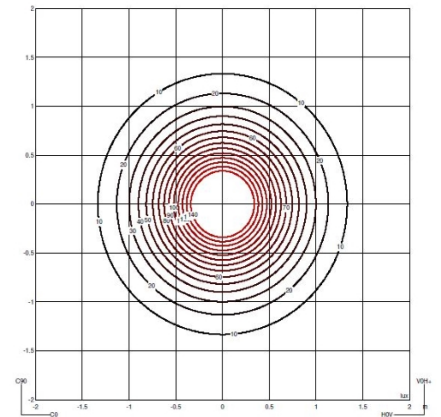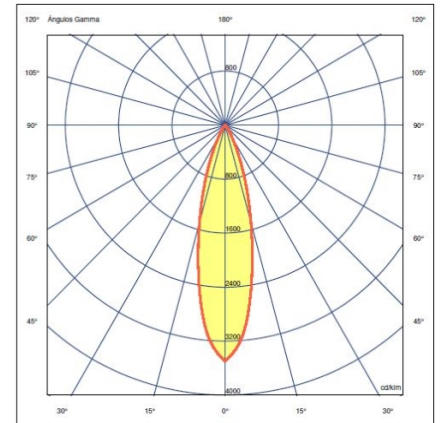

Efficiency	75.909 lm/W
Coordination System	CG
Total Flux	334.0 lm
Maximum Value	3500.41 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa

Bind




6504

Design By Martín Azúa

VIBIA



Bind 6504 offers downward accent lighting through a shallow piece. Its degree of aperture allows for creating contrasts at medium spread.

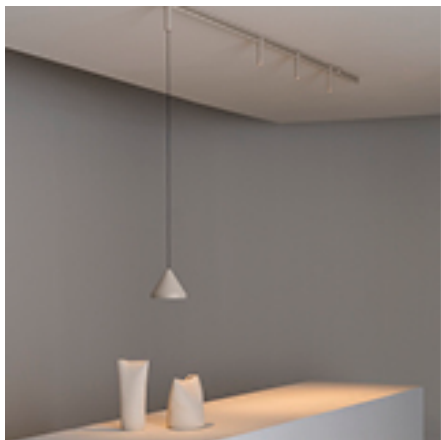Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish	 24 Beige M1 NCS S 2005-Y50R
	 11 Black NCS S 8500-N
LED	2700 K / 3000 K / 3500 K
Dimming	CASAMBI / On/Off 0-10V DALI-2 Casambi Simultaneous Line

Installation type To track

LED CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver 250 48 V V 50~60 Hz HZ



Application Pendants


Packaging Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

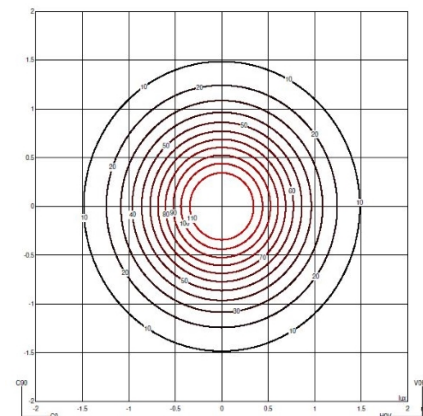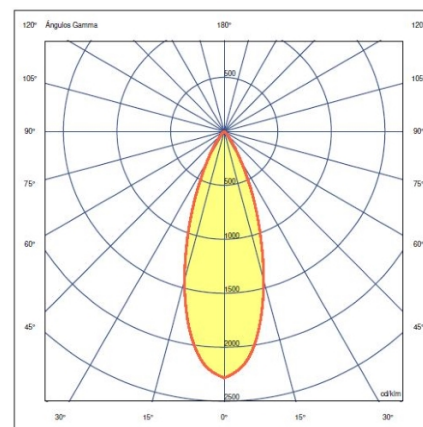

Efficiency	79.773 lm/W
Coordination System	CG
Total Flux	351.0 lm
Maximum Value	2283.58 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa

Bind


6510

Design By Martín Azúa

VIBIA

The Bind 6510 spotlight allows for visual gradations, as well as highlighting functional areas, objects, or architectural elements.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

11 Black
NCS S 8500-N

24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver

250 48 V V 50-60 Hz HZ

LED IP20, Φ 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

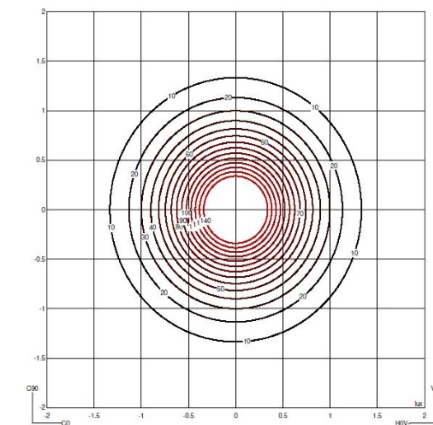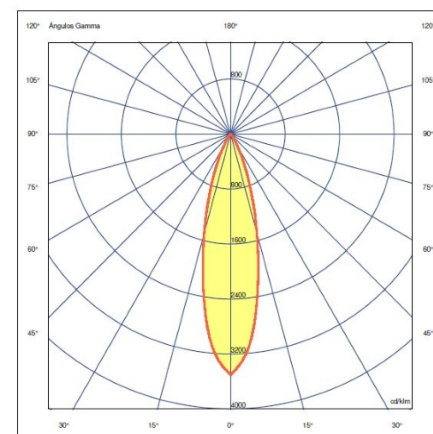

Efficiency

75.909 lm/W

Coordination System

CG

Total Flux

334.0 lm

Maximum Value

3500.41 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa

Bind



6514

Design By Martín Azúa

VIBIA

The Bind 6514 spotlight allows for visual gradations, as well as highlighting functional areas, objects, or architectural elements.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

11 Black
NCS S 8500-N

24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K

Dimming

CASAMBI / On/Off 0-10V DALI-2
Casambi Simultaneous Line

Installation type

To track

LED

CRI>90 451 lm 104,9
2700 K / 3000 K / 3500 K

Driver

250 48 V V 50~60 Hz HZ

LED IP20 Φ 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

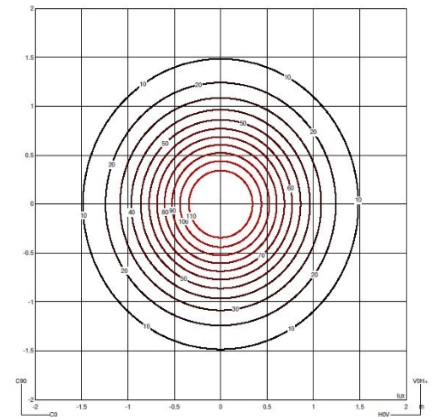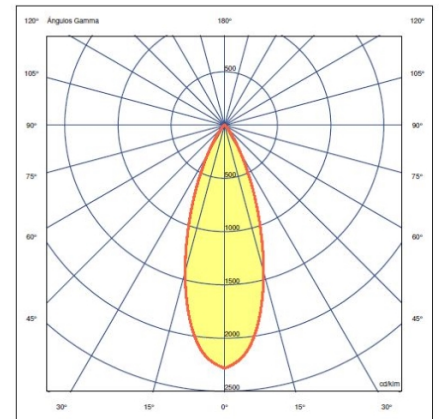

Efficiency 79.773 lm/W
Coordination System CG

Maximum Value 351.0 lm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700

Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa

Bind



6520

Design By Martín Azúa

VIBIA

Bind 6520 offers downward accent lighting through a shallow fixture. Its degree of aperture allows for creating high contrasts over long distances.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish	 11 Black NCS S 8500-N
	 24 Beige M1 NCS S 2005-Y50R
LED	2700 K / 3000 K / 3500 K
Dimming	CASAMBI / On/Off 0-10V DALI-2 Casambi Simultaneous Line

Installation type To track

LED CRI>90 380 lm 92,7
2700 K / 3000 K / 3500 K

Driver 350 48 V V 50~60 Hz HZ

LED IP20 Θ 50-60Hz

Application Pendants


Packaging Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

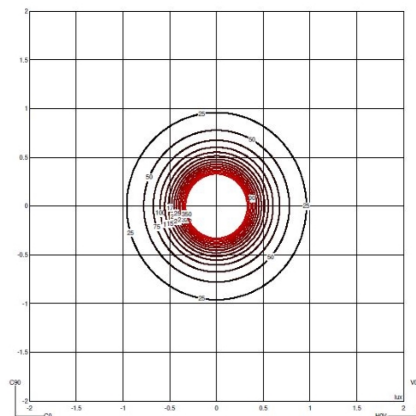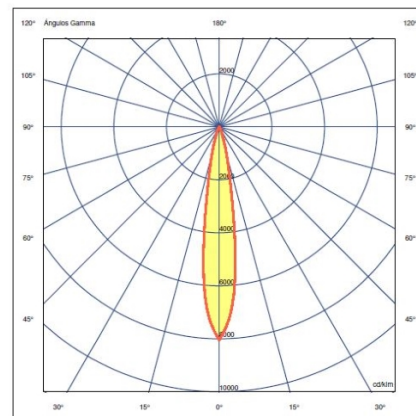

Efficiency	90.928 lm/W
Coordination System	CG
Total Flux	491.0 lm
Maximum Value	8039.76 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700

Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa

Bind



6524

Design By Martín Azúa

VIBIA

Bind offers downward accent lighting through a shallow fixture. Its degree of aperture allows for creating contrasts at medium distances.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

24 Beige M1
NCS S 2005-Y50R

11 Black
NCS S 8500-N

LED

2700 K / 3000 K / 3500 K

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 530 lm 101,9
2700 K / 3000 K / 3500 K

Driver

300 48 V V 50~60 Hz HZ

IP20 UL 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

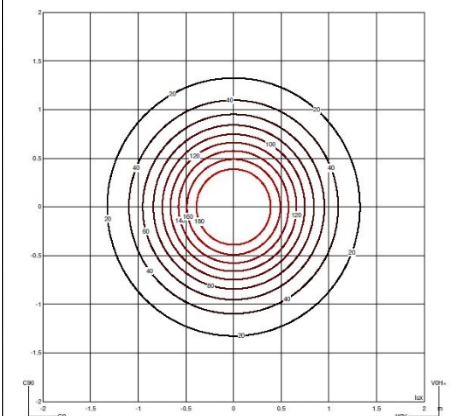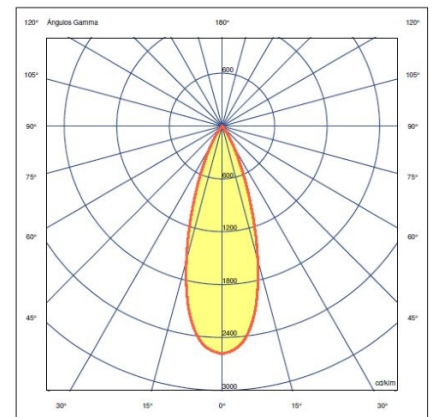

Efficiency 96.037 lm/W
Coordination System CG
Total Flux 518.6 lm
Maximum Value 2586.75 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700

Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish 24 Beige M1
NCS S 2005-Y50R

11 Black
NCS S 8500-N

LED Tunable White K

Dimming CASAMBI

Installation type To track

LED CRI>90 504 lm 91,6
Tunable White K

Driver Constant Current 150 48 V V 50-60
Hz HZ

LED IP20 50-60Hz CASAMBI

Application Pendants


Packaging Box

Gross weight
Net weight

Lighting effect



Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.





Bind offers downward accent lighting through a surface-mounted fixture. Its aperture angle allows for creating moderate contrasts at short distances.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish	 11 Black NCS S 8500-N
	 24 Beige M1 NCS S 2005-Y50R
LED	2700 K / 3000 K / 3500 K
Dimming	On/Off 0-10V DALI-2 Casambi Simultaneous Line / CASAMBI

Installation type To track

LED CRI>90 530 lm 101,9
2700 K / 3000 K / 3500 K

Driver 300 48 V V 50~60 Hz HZ

LED IP20 Θ_{amb} 50-60Hz

Application Pendants


Packaging Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.





Photometric Data

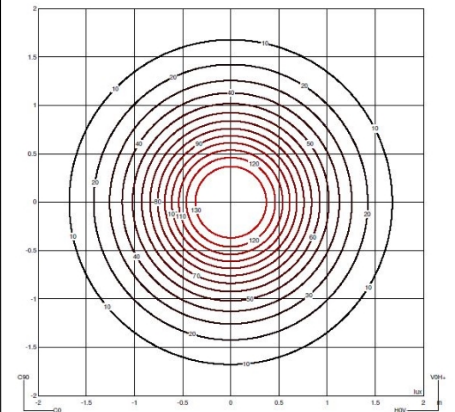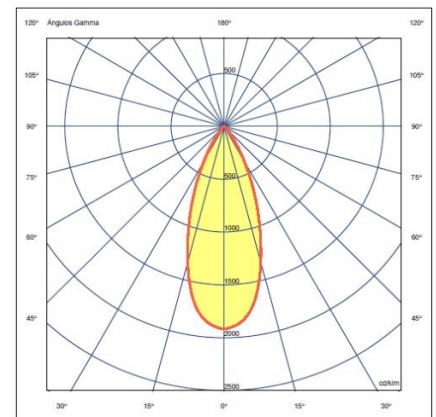

Efficiency	89.397 lm/W
Coordination System	CG
Total Flux	480.1 lm
Maximum Value	1918.08 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

- 11 Black
NCS S 8500-N

- 24 Beige M1
NCS S 2005-Y50R



LED Tunable White K

Dimming CASAMBI

Installation type To track

LED CRI>90 504 lm 91,6
Tunable White K

Driver Constant Current 150 48 V V 50-60
Hz HZ

LED IP20  50-60Hz 

Application Pendants


Packaging Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

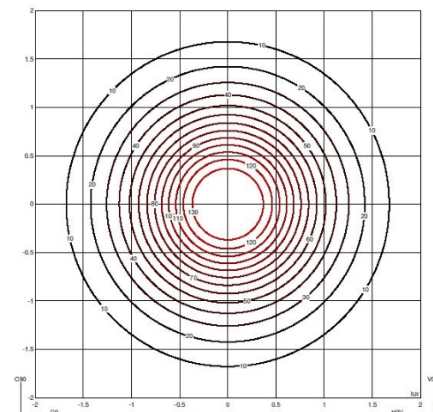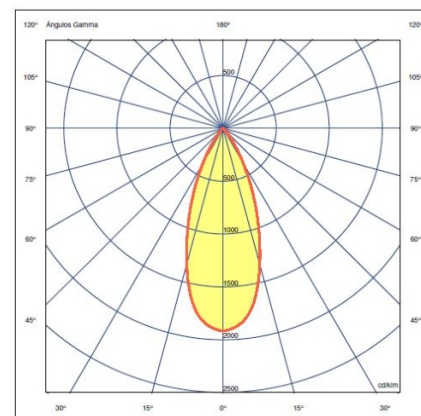

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Bind



6530

Design By Martín Azúa

VIBIA

The Bind spotlight allows for visual gradations, as well as highlighting functional areas, objects, or architectural elements.

Spec sheet

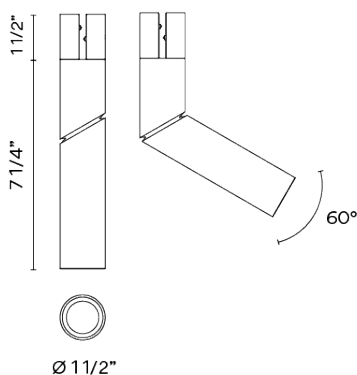

undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish	 11 Black NCS S 8500-N
	 24 Beige M1 NCS S 2005-Y50R
LED	2700 K / 3000 K / 3500 K
Dimming	CASAMBI / On/Off 0-10V DALI-2 Casambi Simultaneous Line

Installation type To track

LED CRI>90 530 lm 101.9
2700 K / 3000 K / 3500 K

Driver 300 48 V V 50~60 Hz HZ

LED IP20 Φ 50-60Hz

Application Pendants


Packaging Box

Gross weight
Net weight



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

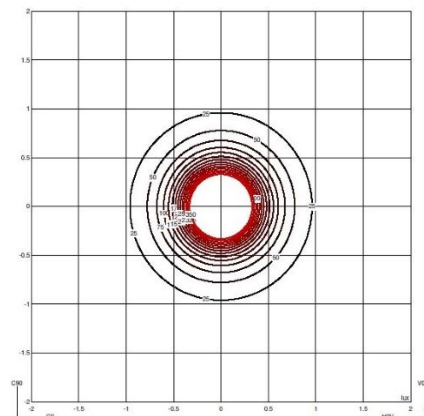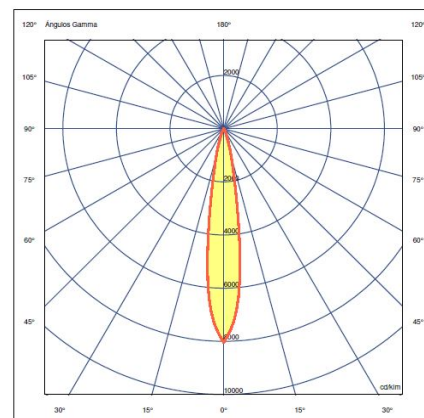

Efficiency	90.928 lm/W
Coordination System	CG
Total Flux	491.0 lm
Maximum Value	8039.76 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700

Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa

Bind



6534

Design By Martín Azúa

VIBIA

The Bind 6535 spotlight allows for visual gradations, as well as highlighting functional areas, objects, or architectural elements.

Spec sheet

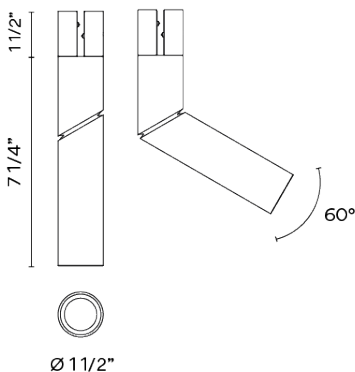

undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

24 Beige M1
NCS S 2005-Y50R

11 Black
NCS S 8500-N

LED

2700 K / 3000 K / 3500 K / Tunable White

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 530 lm 101,9
2700 K / 3000 K / 3500 K / Tunable White

Driver

Constant Current 300 48 V V 50~60 Hz HZ

LED IP20 Θ_{amb} 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

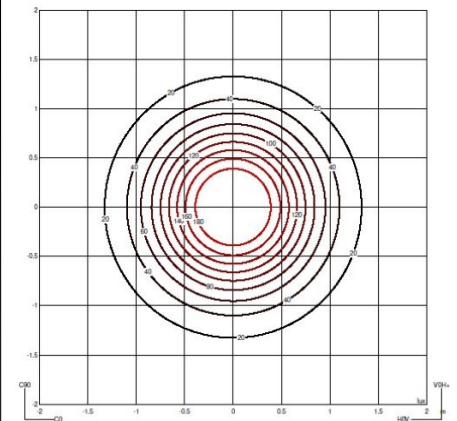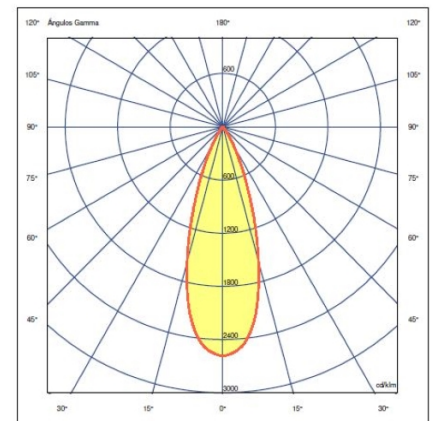

Efficiency 96.037 lm/W
Coordination System CG
Total Flux 518.6 lm
Maximum Value 2586.75 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700

Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa

Bind



6538

Design By Martín Azúa

VIBIA

The Bind 6538 spotlight allows for visual gradations, as well as highlighting functional areas, objects, or architectural elements.

Spec sheet

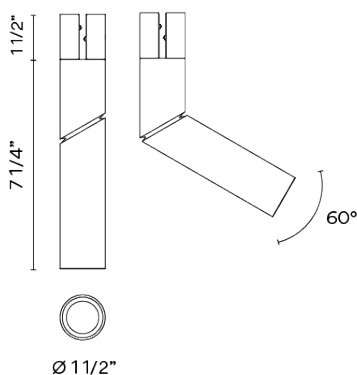

undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

24 Beige M1
NCS S 2005-Y50R

11 Black
NCS S 8500-N

LED

2700 K / 3000 K / 3500 K / Tunable White

Dimming

CASAMBI / On/Off 0-10V DALI-2
Casambi Simultaneous Line

Installation type

To track

LED

CRI>90 530 lm 101,9
2700 K / 3000 K / 3500 K / Tunable White

Driver

350 48 V V 50-60 Hz HZ

LED IP20  50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Accent Spotlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

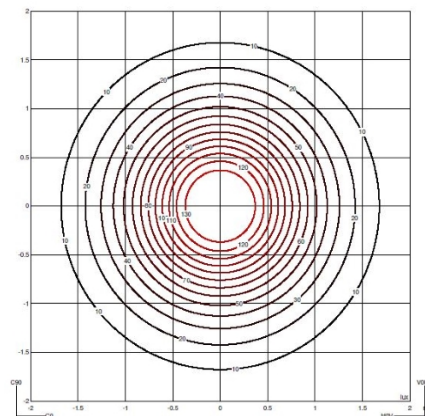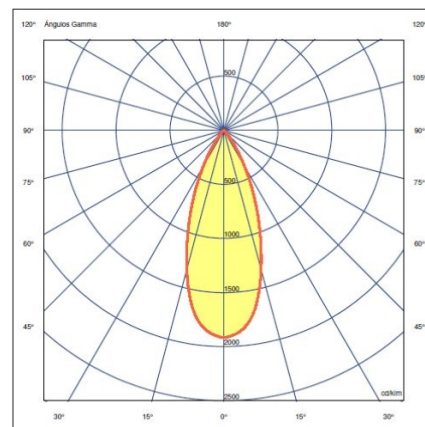

Efficiency

89,397 lm/W

Coordination System

CG

Total Flux

480.1 lm

Maximum Value

1918.08 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa

Bind



6540

Design By Martín Azúa

VIBIA

The Bind 6540 spotlight offers soft contrasts, flooding the space from above, thanks to a generous diameter and a wider light gradient.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

● 11 Black
NCS S 8500-N

● 24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K / Tunable White

Dimming

CASAMBI / On/Off 0-10V DALI-2
Casambi Simultaneous Line

Installation type

To track

LED

CRI>90 1395 lm 107.3
2700 K / 3000 K / 3500 K / Tunable White

Driver

700 48 V V 50-60 Hz HZ

LED IP20 Φ 50-60Hz

Application

Pendants

Packaging

Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

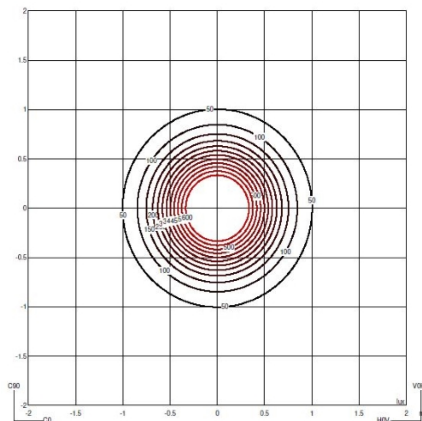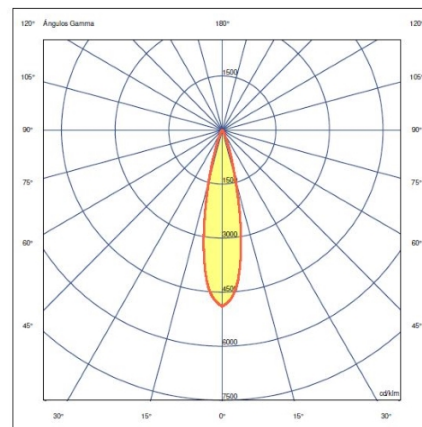

Efficiency 78.923 lm/W

Coordination System CG

Total Flux 1026.0 lm

Maximum Value 4893.78 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina
272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700
Spain / Portugal T +34 934 796 970

sales@vibia.com
www.vibia.com/us/usa

Bind




6542

Design By Martín Azúa

VIBIA

The Bind 6542 spotlight offers soft contrasts, flooding the space from above. Its aperture degree allows for creating moderate contrasts at short distances.

Spec sheet

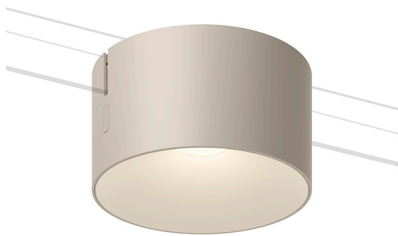

Ø 7 1/4"

undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

24 Beige M1
NCS S 2005-Y50R

11 Black
NCS S 8500-N

LED

2700 K / 3000 K / 3500 K / Tunable White

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 1395 lm 107,3
2700 K / 3000 K / 3500 K / Tunable White

Driver

700 48 V V 50~60 Hz HZ

LED IP20 Φ 50-60Hz

Application

Pendants

Packaging

Box

Gross weight
Net weight



Lighting effect

Accent Downlight

Narrow: Angles less than 20°. Suitable for generating high contrasts or projections at far distances.



Photometric Data

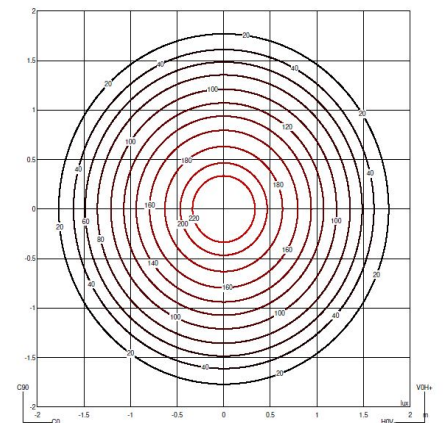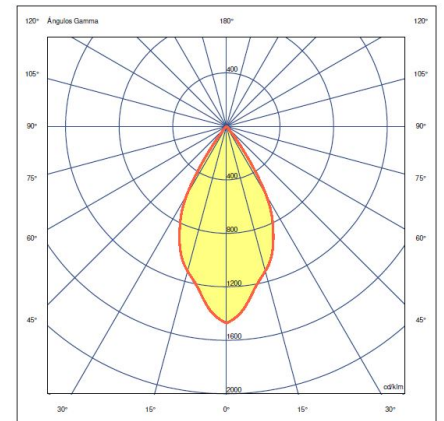

Efficiency 83.538 lm/W
Coordination System CG
Total Flux 1086.0 lm
Maximum Value 1472.21 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

Office / Oficina

272 Fernwood Ave. Edison, NJ 08837. USA

International T 732 417 1700


Spain / Portugal T +34 934 796 970

sales@vibia.com

www.vibia.com/us/usa

Single or multiple Skan pendants can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendants. Black pincer finish to match with the black Bind track.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

- 42 Blue M1
test ral
- 37 Terra Red
test ral
- 24 Beige M1
NCS S 2005-Y50R
- 47 Green L1
test ral
- 10 White
test ral
- 11 Black
NCS S 8500-N

LED

2700 K / 3000 K / 3500 K

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 1041 lm 116
2700 K / 3000 K / 3500 K

Driver

Constant Current 350 48 V V 50~60
Hz HZ

LED IP20, 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Close Proximity - Flat

Lighting applications for illumination in close proximity to the user



Photometric Data

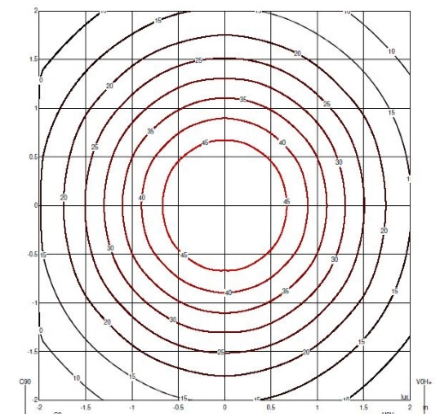
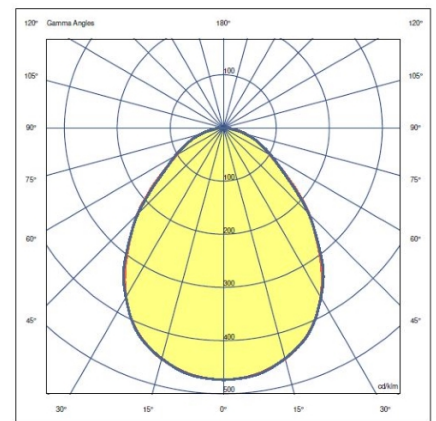


All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Martín Azúa

Single or multiple Skan pendants can be hung as desired to create intricate chandeliers using a combination of tracks with multiple pendants. Beige finish coordinates with the beige Bind track.

Spec sheet

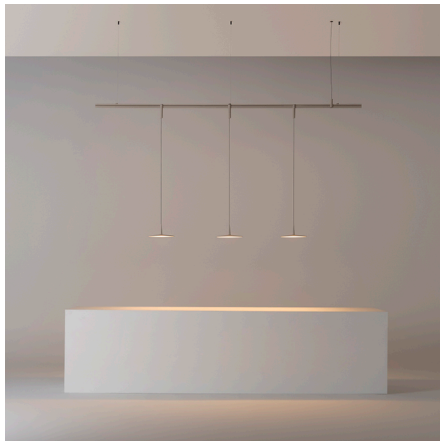

undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

- 11 Black
NCS S 8500-N
- 24 Beige M1
NCS S 2005-Y50R
- 47 Green L1
test ral
- 42 Blue M1
test ral
- 37 Terra Red
test ral
- 10 White
test ral

LED

2700 K / 3000 K / 3500 K

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 1041 lm 116
2700 K / 3000 K / 3500 K

Driver

Constant Current 350 48 V V 50-60
Hz HZ

LED IP20, 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Close Proximity - Flat

Lighting applications for illumination in close proximity to the user



Photometric Data

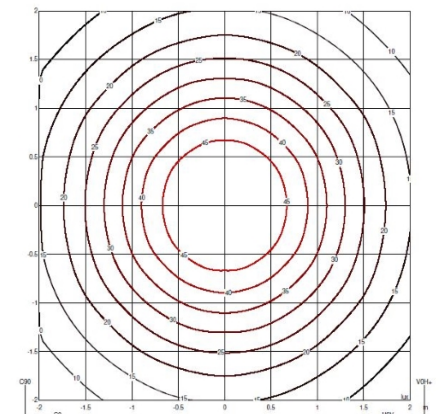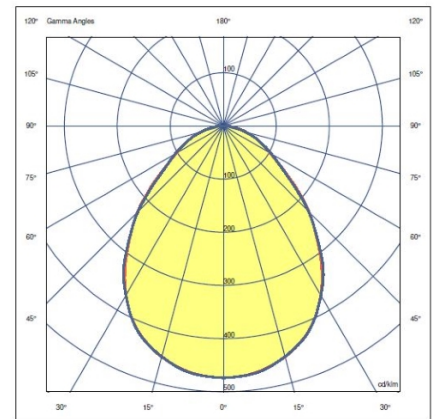

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Single or multiple Slim pendants can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendants. Black pincer finish to match with the black Bind track.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

- 24 Beige M1
NCS S 2005-Y50R
- 47 Green L1
test ral
- 11 Black
NCS S 8500-N
- 37 Terra Red
test ral
- 68 Ocre
test ral
- 10 White
test ral

LED

2700 K / 3000 K / 3500 K

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 199 lm 95
2700 K / 3000 K / 3500 K

Driver

Constant Current 700 48 V V 50~60
Hz HZ

LED IP20 50-60Hz

Application

Pendants

Packaging

Box

Gross weight
Net weight



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

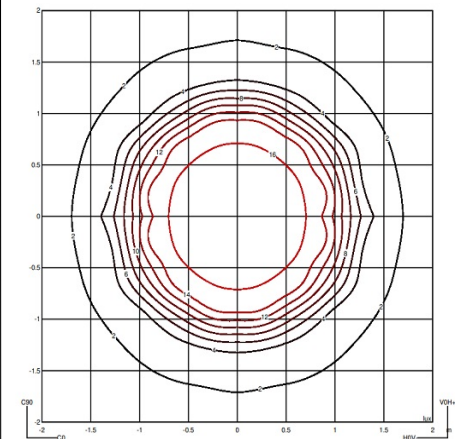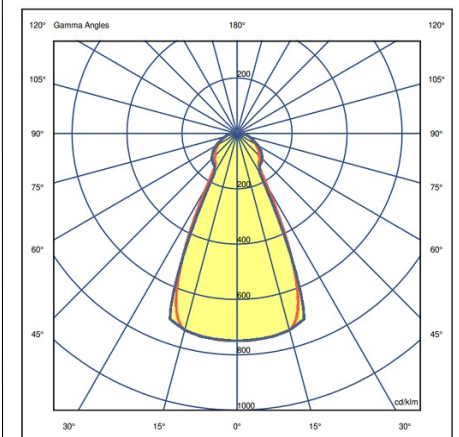


All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Martín Azúa

Single or multiple Slim pendants can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendants. Beige pincer finish to match with the beige Bind track.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

- 11 Black
NCS S 8500-N
- 68 Ocre
test ral
- 37 Terra Red
test ral
- 24 Beige M1
NCS S 2005-Y50R
- 10 White
test ral
- 47 Green L1
test ral

LED

2700 K / 3000 K / 3500 K

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 199 lm 95
2700 K / 3000 K / 3500 K

Driver

Constant Current 700 48 V V 50~60
Hz HZ

LED IP20, 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



Photometric Data

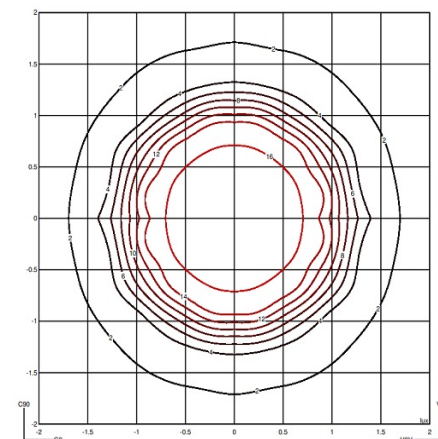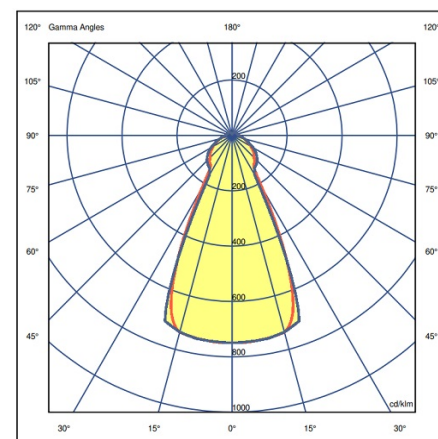

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Martín Azúa

Single or multiple North pendants can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendants. Black pincer finish to match with the black Bind track.

Spec sheet



undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

- 10 White
NCS S 0300-N
- 24 Beige M1
NCS S 2005-Y50R
- 11 Black
NCS S 8500-N

LED

2700 K / 3000 K / 3500 K

Dimming

On/Off 0-10V DALI-2 Casambi
Simultaneous Line / CASAMBI

Installation type

To track

LED

CRI>90 1041 lm 116
2700 K / 3000 K / 3500 K

Driver

Constant Current 350 48 V V 50-60
Hz HZ

LED IP20 50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight



Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



Photometric Data

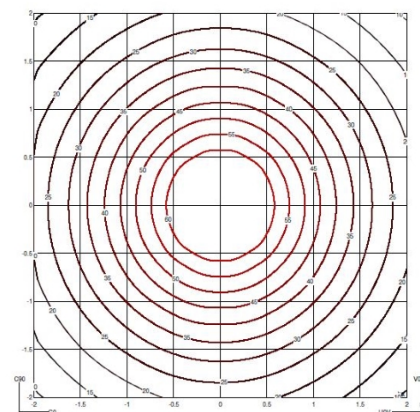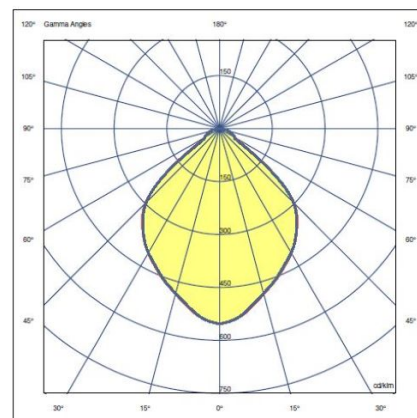


All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Martín Azúa

Single or multiple North pendants can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendants. Beige pincer finish to match with the beige Bind track.

Spec sheet

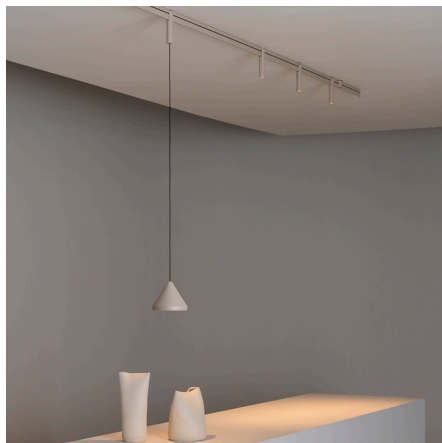

undefined: undefined

Any modifications require a minimum order quantity and extra lead time


Finish	<ul style="list-style-type: none"> 11 Black NCS S 8500-N 24 Beige M1 NCS S 2005-Y50R 10 White NCS S 0300-N
LED	2700 K / 3000 K / 3500 K
Dimming	CASAMBI / On/Off 0-10V DALI-2 Casambi Simultaneous Line
Installation type	To track

LED	CRI>90 1041 lm 116 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 48 V V 50~60 Hz HZ
	<input checked="" type="checkbox"/> LED <input type="checkbox"/> IP20 <input checked="" type="checkbox"/> 50-60Hz
Application	Pendants
Packaging	Box
	Gross weight Net weight

Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user




All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Martín Azúa

Single or multiple Tempo pendants can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendants. Black pincer finish to match with the black Bind track.

Spec sheet

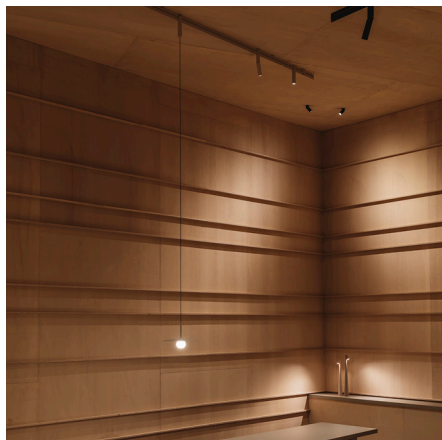

undefined: undefined

Any modifications require a minimum order quantity and extra lead time

Finish

18 Graphite
ADAPTA RF 9913

37 Terra Red
test ral

62 Verde
test ral

LED

2700 K

Dimming

CASAMBI / On/Off 0-10V DALI-2
Casambi Simultaneous Line

Installation type

To track

LED

CRI>90 440.81 lm 110
2700 K

Driver

Constant Current 350 50~60 Hz HZ

LED IP20,  50-60Hz

Application

Pendants

Packaging


Box

Gross weight
Net weight

Lighting effect

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com