

**Description**

Under Pressure delivers an impressive contrast, an alluring juxtaposition of the organic malleability of glass and uncompromising precision of metal. The lights are manufactured in assorted sizes and typologies, backed with a broad spectrum of glass colour and surface finish options, for a look that always catches the eye and elevates the aesthetics of any interior.


**Tech. description**

The light comprises a helical dural fixture connected by a light-conducting diffuser and glass shade held in place on both ends by robust nuts. An LED module is integrated into the upper part of the helix, illuminating the light-conducting diffuser at the centre of the glass shade. At the bottom of the helix is an LED module that illuminates the space beneath the light. This assembly is attached to the power cable via a BROKIS connector. The light is hung from a ceiling canopy, which houses the control electronics.

Available colour options: <https://mbapi.cz/red/pis/eu/en/pc1388>

CONSTRUCTION SPECIFICATION

Weight:	4.3 kg
Construction material:	glass, metal
Cord length [mm]:	2,200 mm
Mounting:	Ceiling
Environment:	Indoor

DIMENSIONS [mm]**ELECTRICAL SPECIFICATION**

Input voltage [V]:	100 - 240 V
Frequency [Hz]:	50-60 Hz
Max. power [W]:	7.7 W
Coverage IP:	20
Socket:	-
Light source:	LED module
Energy class:	E

CERTIFICATIONS

BROKIS®

BROKIS S.R.O.
ŠPANIĚLOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



**CM17826 LED modul 2,5W 24VDC
without optic 2700K PCB5050 2.524
927**


Type	LED module
Lamp wattage [W]	2,5 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	250 lm
Light colour [K]	2700 K
CRI	90+
Dimmable	yes

**CM17826 LED modul 2,5W 24VDC
without optic 2700K PCB5050 2.524
927**

Type	LED module
Lamp wattage [W]	2,5 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	250 lm
Light colour [K]	2700 K
CRI	90+
Dimmable	yes



INNER FIXTURE

Dimensions O x w [mm] 168 x 50 mm
Weight [kg] 1 kg
Material metal

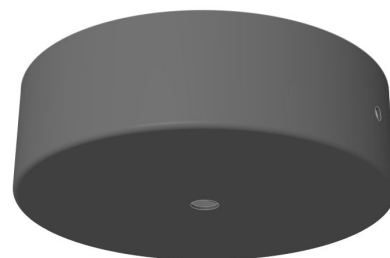

Drawing

Hole placement

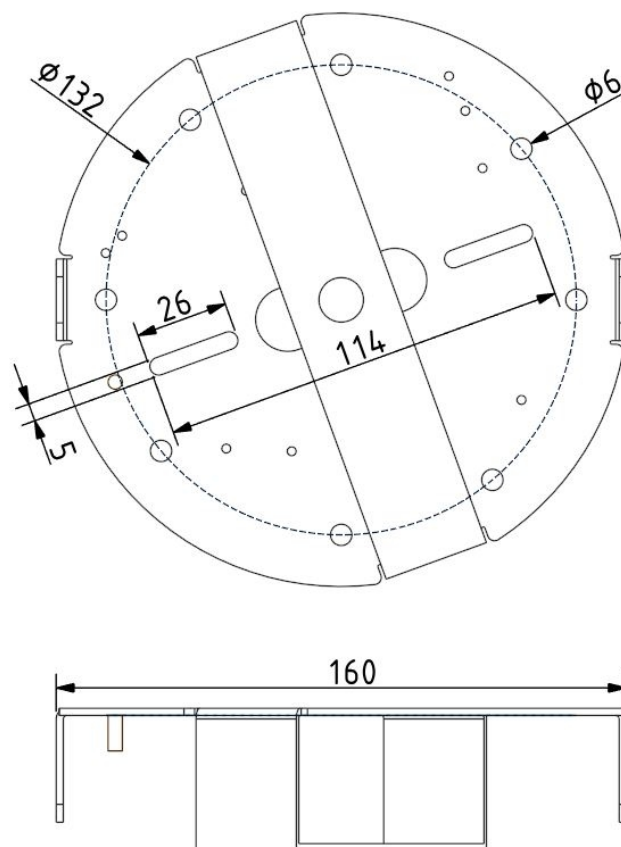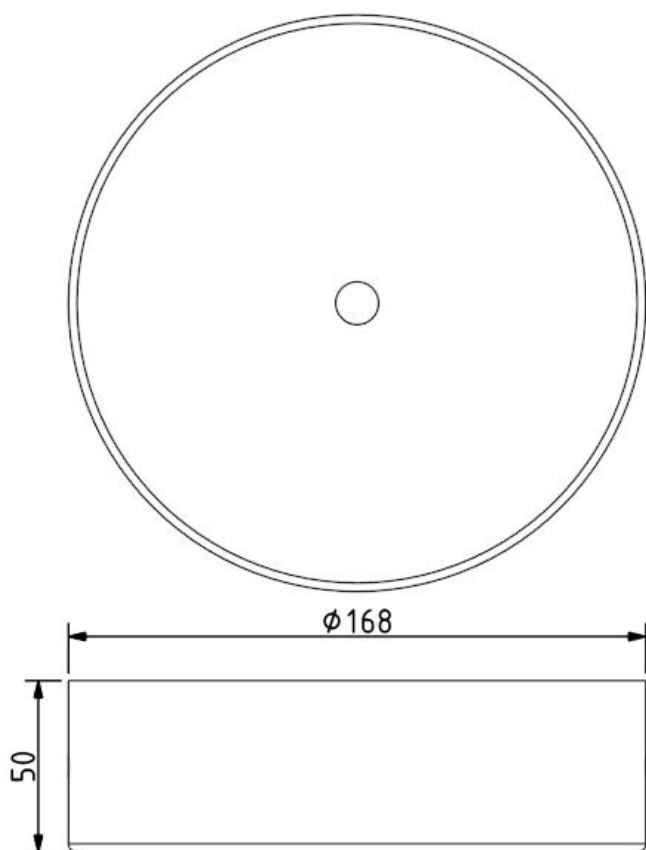

DATASHEET

Type: **UNDER PRESSURE**
Name: Pendant light
ID: PC1389
Designed by: Boris Klimek & Lenka Dámová



Download

Description

Under Pressure delivers an impressive contrast, an alluring juxtaposition of the organic malleability of glass and uncompromising precision of metal. The lights are manufactured in assorted sizes and typologies, backed with a broad spectrum of glass colour and surface finish options, for a look that always catches the eye and elevates the aesthetics of any interior.



Tech. description


The light comprises a helical dural fixture connected by a light-conducting diffuser and glass shade held in place on both ends by robust nuts. An LED module is integrated into the upper part of the helix, illuminating the light-conducting diffuser at the centre of the glass shade. At the bottom of the helix is an LED module that illuminates the space beneath the light. This assembly is attached to the power cable via a BROKIS connector. The light is hung from a ceiling canopy, which houses the control electronics.

Available colour options: <https://mbapi.cz/red/pis/eu/en/pc1389>

CONSTRUCTION SPECIFICATION

Weight: 5.5 kg
Construction material: glass, metal
Cord length [mm]: 2,200 mm
Mounting: Ceiling
Environment: Indoor

DIMENSIONS [mm]



ELECTRICAL SPECIFICATION

Input voltage [V]: 100 - 240 V
Frequency [Hz]: 50-60 Hz
Max. power [W]: 7.7 W
Coverage IP: 20
Socket: -
Light source: LED module
Energy class: E

CERTIFICATIONS



BROKIS S.R.O.
ŠPANILOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



**CM17826 LED modul 2,5W 24VDC
without optic 2700K PCB5050 2.524
927**


Type	LED module
Lamp wattage [W]	2,5 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	250 lm
Light colour [K]	2700 K
CRI	90+
Dimmable	yes

**CM17826 LED modul 2,5W 24VDC
without optic 2700K PCB5050 2.524
927**


Type	LED module
Lamp wattage [W]	2,5 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	250 lm
Light colour [K]	2700 K
CRI	90+
Dimmable	yes

INNER FIXTURE


Dimensions O x w [mm] 168 x 50 mm
Weight [kg] 1 kg
Material metal

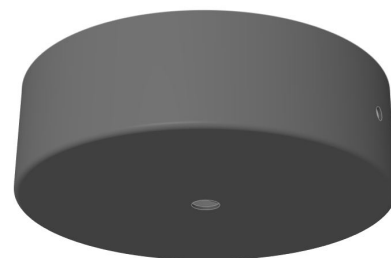

Drawing

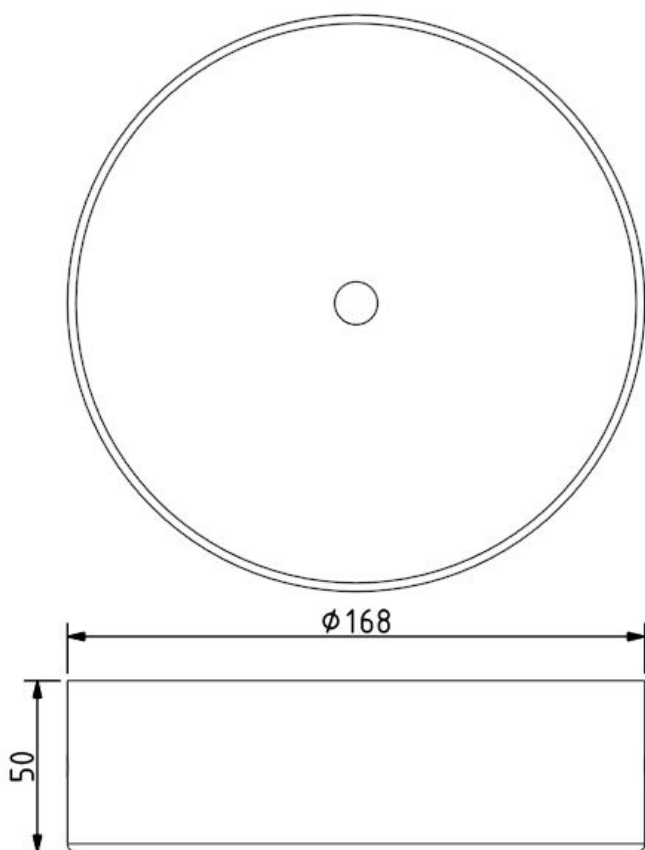

Hole placement

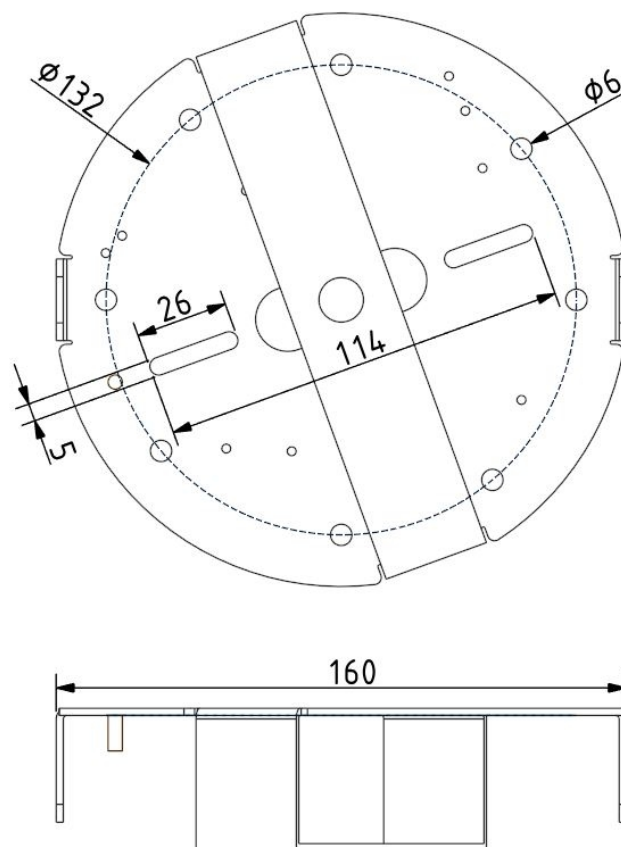



Description

Under Pressure delivers an impressive contrast, an alluring juxtaposition of the organic malleability of glass and uncompromising precision of metal. The lights are manufactured in assorted sizes and typologies, backed with a broad spectrum of glass colour and surface finish options, for a look that always catches the eye and elevates the aesthetics of any interior.

Tech. description

The light comprises a helical dural fixture connected by a light-conducting diffuser and glass shade held in place on both ends by robust nuts. An LED module is integrated into the upper part of the helix, illuminating the light-conducting diffuser at the centre of the glass shade. At the bottom of the helix is an LED module that illuminates the space beneath the light. This assembly is attached to the power cable via a BROKIS connector. The light is hung from a ceiling canopy, which houses the control electronics.




Available colour options: <https://mbapi.cz/red/pis/eu/en/pc1390>

CONSTRUCTION SPECIFICATION

Weight:	5.1 kg
Construction material:	glass, metal
Cord length [mm]:	2,200 mm
Mounting:	Ceiling
Environment:	Indoor

DIMENSIONS [mm]



ELECTRICAL SPECIFICATION

Input voltage [V]:	100 - 240 V
Frequency [Hz]:	50-60 Hz
Max. power [W]:	7.7 W
Coverage IP:	20
Socket:	-
Light source:	LED module
Energy class:	E

CERTIFICATIONS





**CM17826 LED modul 2,5W 24VDC
without optic 2700K PCB5050 2.524
927**


Type	LED module
Lamp wattage [W]	2,5 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	250 lm
Light colour [K]	2700 K
CRI	90+
Dimmable	yes

**CM17826 LED modul 2,5W 24VDC
without optic 2700K PCB5050 2.524
927**


Type	LED module
Lamp wattage [W]	2,5 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	250 lm
Light colour [K]	2700 K
CRI	90+
Dimmable	yes

INNER FIXTURE

Dimensions O x w [mm] 168 x 50 mm
Weight [kg] 1 kg
Material metal

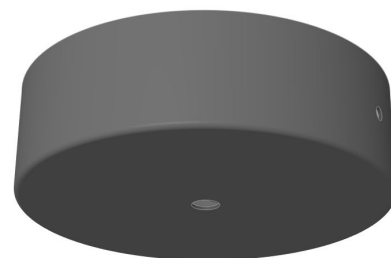

Drawing

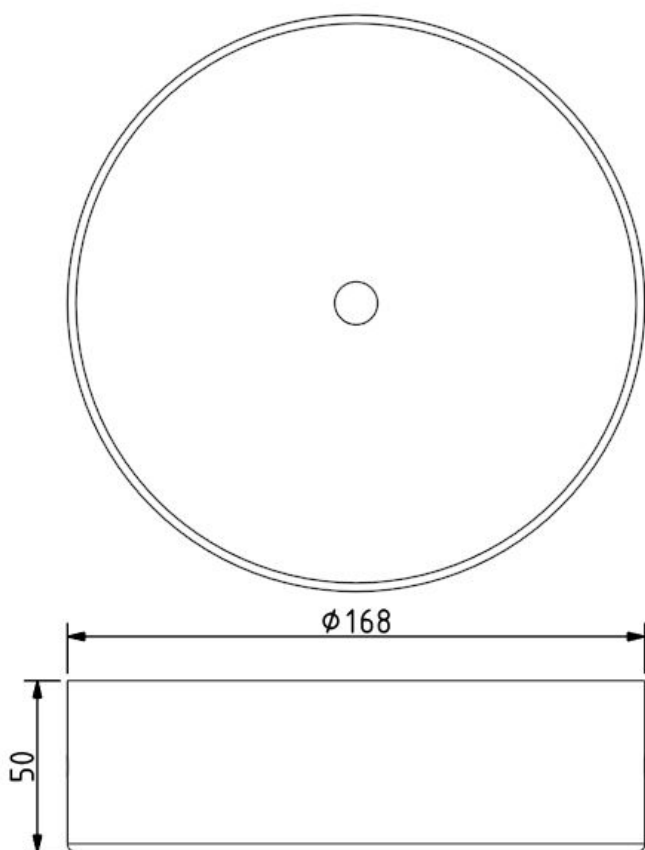

Hole placement

